

PRODUCT DATASHEET

UB & UBR VARIANTS

UNIVERSAL BASE RANGE


The Argus conventional UB base range is a low profile mounting base designed for all the Aurora conventional and Vega intelligent automatic detection devices. Its square cable clamps provide a secure and reliable cable termination. Variants are available with a short clip which provides continuity during a detector removal. The base layout is designed with multiple mounting positions for use with a variety of industry standard back boxes.



KEY FEATURES

- Compatible with all Vega and Aurora devices
- Low Profile – 16 mm
- Quick cable connectivity
- Available in the following variants:
 - UB100** Universal Base
 - UB100S** Universal Base with shorting clip
 - UBR100** Universal Base 1K Ohm Resistor
 - UBR100-330** Universal Base 330 Ohm Resistor
 - UBR100-390** Universal Base 390 Ohm Resistor
 - UBR100-470** Universal Base 470 Ohm Resistor
- Also available in the following variants (subject to minimum order quantities):
 - UBD100** Deep Schottky Diode Base
 - UBDR100** Deep Base 1K Ohm Resistor & Schottky Diode
 - UBDR100-330** Deep Base 330 Ohm Resistor & Schottky Diode
 - UBDR100-390** Deep Base 390 Ohm Resistor & Schottky Diode
 - UBDR100-470** Deep Base 470 Ohm Resistor & Schottky Diode

TECHNICAL INFORMATION

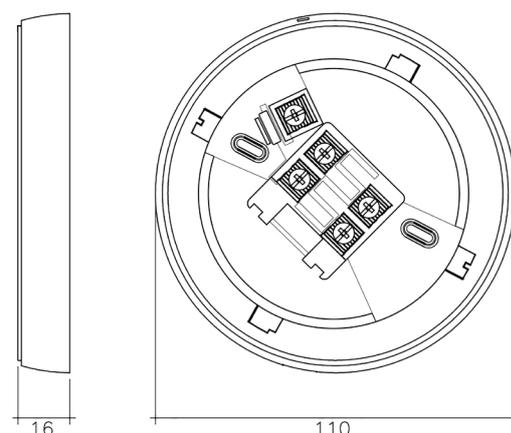

TECHNICAL SPECIFICATION

- | | |
|----------------------------------|----------------|
| ■ Dimensions | 110mm x 16mm |
| ■ Weight | 50g |
| ■ Temperature Range (no icing) | -10°C to +55°C |
| ■ Max. humidity (non condensing) | 95% RH |
| ■ Cable size | 0.5mm - 2.5mm |

STANDARDS & APPROVALS

All bases are approved under the relevant Aurora or Vega device certification