

PRODUCT DATASHEET

VMIC120

INTELLIGENT INPUT AND RELAY OUTPUT MODULE (PLATE MOUNT)


The Argus module range provides an ideal solution to the monitoring and control requirements of most fire detection and alarm systems, ranging from small and simple, to large and complex. By utilising the Argus fully digital communication protocol, reliable and fast operation is achieved even when employing the impressive 240 device loop capacity. A choice of mechanical configurations provides easy integration of the units into a variety of field locations. The VMIC120 is mounted on a standard faceplate and can be used with a surface back box or flush mounted and provides the capability to both remotely monitor a single circuit and control a single ancillary circuit using a set of volt-free changeover relay contacts. The input circuit is monitored for fault and an alarm condition. Bi-colour LEDs provide local indication of device status.



KEY FEATURES

- Employs the highly reliable Argus digital protocol
- 3rd party approval to EN54-17 and EN54-18
- Integrated short circuit isolators to protect and maintain operation
- Loop powered with very low current consumption
- Robust proven design offering operation over a wide temp. range
- Monitored input and volt-free output providing changeover relay contacts
- Fast fit plug-in cable connections
- Alternate mechanical variants available to satisfy different applications
- LED status indicators for both input and output circuits
- Fits to single gang (deep) back box
- 5 year product warranty

TECHNICAL INFORMATION

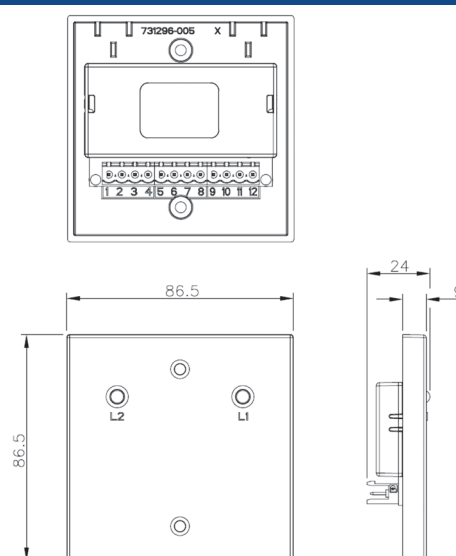

TECHNICAL SPECIFICATION

- | | |
|----------------------------------|----------------------------------|
| ■ Loop voltage range | 15Vdc – 40Vdc* |
| ■ Normal Standby Current | 250µA @ 24Vdc |
| ■ Alarm Current (1-2 red LED) | 6-12mA @ 24Vdc |
| ■ Dimensions | 86.5 x 86.5 x 24mm (ex-back box) |
| ■ Max output rating | 2A @ 30Vdc |
| ■ Temperature Range (no icing) | -10°C to +55°C |
| ■ Max. humidity (non condensing) | 95% RH |
| ■ Weight | 200g |

*Note: Min 18VDC for operation of LED.

STANDARDS & APPROVALS

- BS EN54-17: Short Circuit Isolators
- BS EN54-18: Input/Output Devices



0786