

PRODUCT DATASHEET

VW2W100/865

WIRELESS TRANSLATOR MODULE (STATIC)


The VW2W100/865 Translator Module is one of the core components of the Argus intelligent hybrid fire detection and alarm system. When connected on to a compatible loop, the unit is capable of linking up to 32 fully intelligent wireless field devices with the fire alarm system. The translator allows fully intelligent and seamless integration of the wireless devices alongside standard wired devices or can be used independently to form completely wireless systems. Using well-proven wireless technology and a patented orthogonal antenna design ensures the highest levels of life safety and system reliability.



KEY FEATURES

- Loop Powered
- Proven Wireless Technology
- 3rd party approval to EN54-17, EN54-18 and EN54-25
- Bi-directional wireless communication
- 5 year product warranty
- IP protection for challenging environments
- Compatible with up to 7 expander modules
- Low current consumption
- Supports full device intelligence
- Site programmable

TECHNICAL INFORMATION

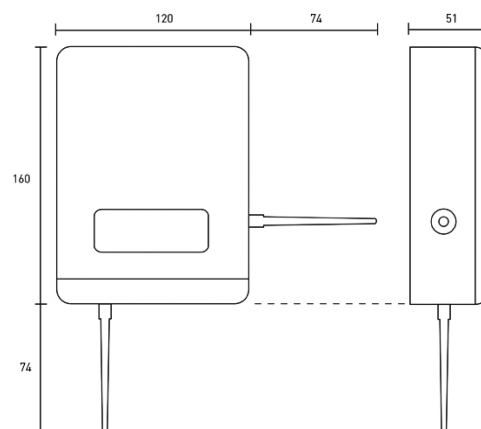

TECHNICAL SPECIFICATION

■ Loop power supply range	18Vdc – 40Vdc
■ Operating frequency range	865 MHz
■ Max radiated power	5dBm (3mW)
■ Operating frequency channels	7
■ Communication range with the Expander Module	≤ 250m (in open space)
■ Communication range with wireless field devices	≤ 150m (in open space)
■ IP rating	65
■ Dimensions (without antennae)	120 mm x 160 mm x 51 mm
■ Weight	300g
■ Operating Temperature	-10°C to +50°C
■ Max humidity (non condensing)	95% RH
■ Typical current consumption	20mA (@ 24V dc)

Note: Certified device performance may vary depending on the approval body.

STANDARDS & APPROVALS

- BS EN 54-17: Short Circuit Isolators
- BS EN 54-18: Input/Output Devices
- BS EN 54-25: Components using radio links and system requirements

