

SGMCB-EOLM


END OF LINE INTERFACE MODULE

DESCRIPTION

The **SGMCB-EOLM** is an EOL interface module between a battery power supplied wireless output module and a **VM240**.


INSTALLATION

Assemble the **SGMCB-EOLM** to the **VM240** as in the following picture:

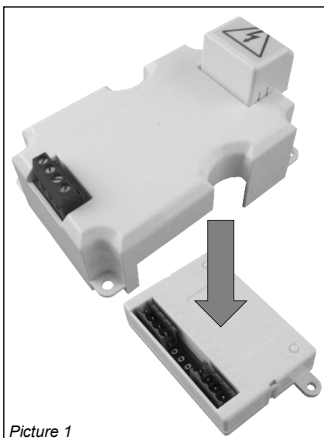


Picture 1

GENERAL USAGE SCHEME

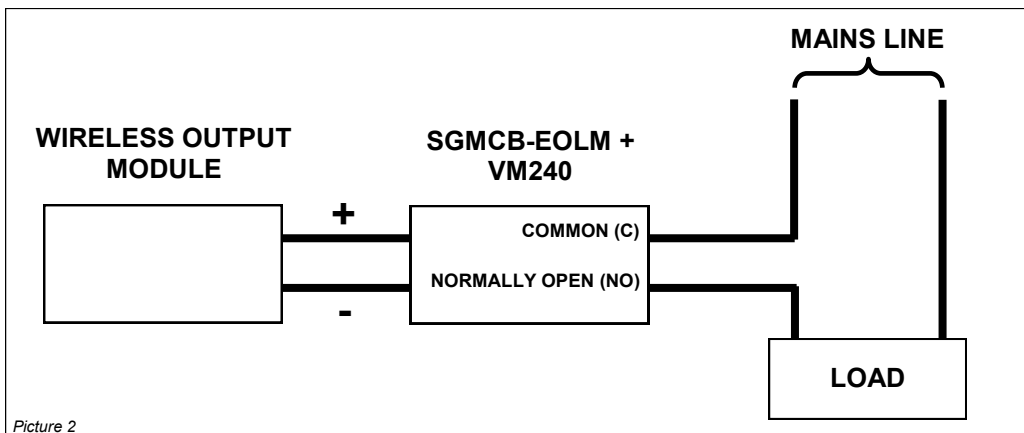

Picture 2

CONNECTION TO THE WIRELESS OUTPUT MODULE

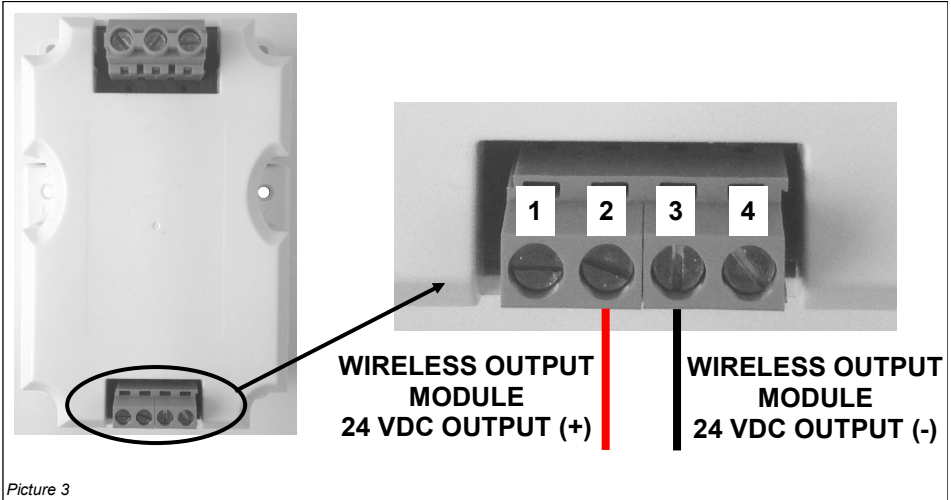

THE ADDITIONAL INTERFACE MODULE SUPPLIED WITH THE WIRELESS OUTPUT MODULE IS NOT NEEDED.

NO!



TECHNICAL SPECIFICATIONS

Wireless output module voltage	24 Vdc	
Current draw from wireless output voltage	12.5 mA	At 24 Vdc



REFER TO AND FOLLOW NATIONAL CODES OF WIRING AND CABLING PRACTICE AND OTHER INTERNATIONALLY RECOGNIZED STANDARDS.

APPLY SCRUPULOUSLY THE INSTRUCTIONS GIVEN IN THE VM240 MANUAL, ESPECIALLY THE SAFETY WARNING NOTES AND THE WIRING PROCEDURES.

WARNINGS AND LIMITATIONS

Our devices use high quality electronic components and plastic materials that are highly resistant to environmental deterioration. However, after 10 years of continuous operation, it is advisable to replace the devices in order to minimize the risk of reduced performance caused by external factors. Ensure that this device is only used with compatible control panels. Detection systems must be checked, serviced and maintained on a regular basis to confirm correct operation. Smoke sensors may respond differently to various kinds of smoke particles, thus application advice should be sought for special risks. Sensors cannot respond correctly if barriers exist between them and the fire location and may be affected by special environmental conditions. Refer to and follow national codes of practice and other internationally recognized fire engineering standards. Appropriate risk assessment should be carried out initially to determine correct design criteria and updated periodically.

WARRANTY

All devices are supplied with the benefit of a limited 3 year warranty relating to faulty materials or manufacturing defects, effective from the production date indicated on each product. This warranty is invalidated by mechanical or electrical damage caused in the field by incorrect handling or usage. Product must be returned via your authorized supplier for repair or replacement together with full information on any problem identified. Full details on our warranty and product's returns policy can be obtained upon request.